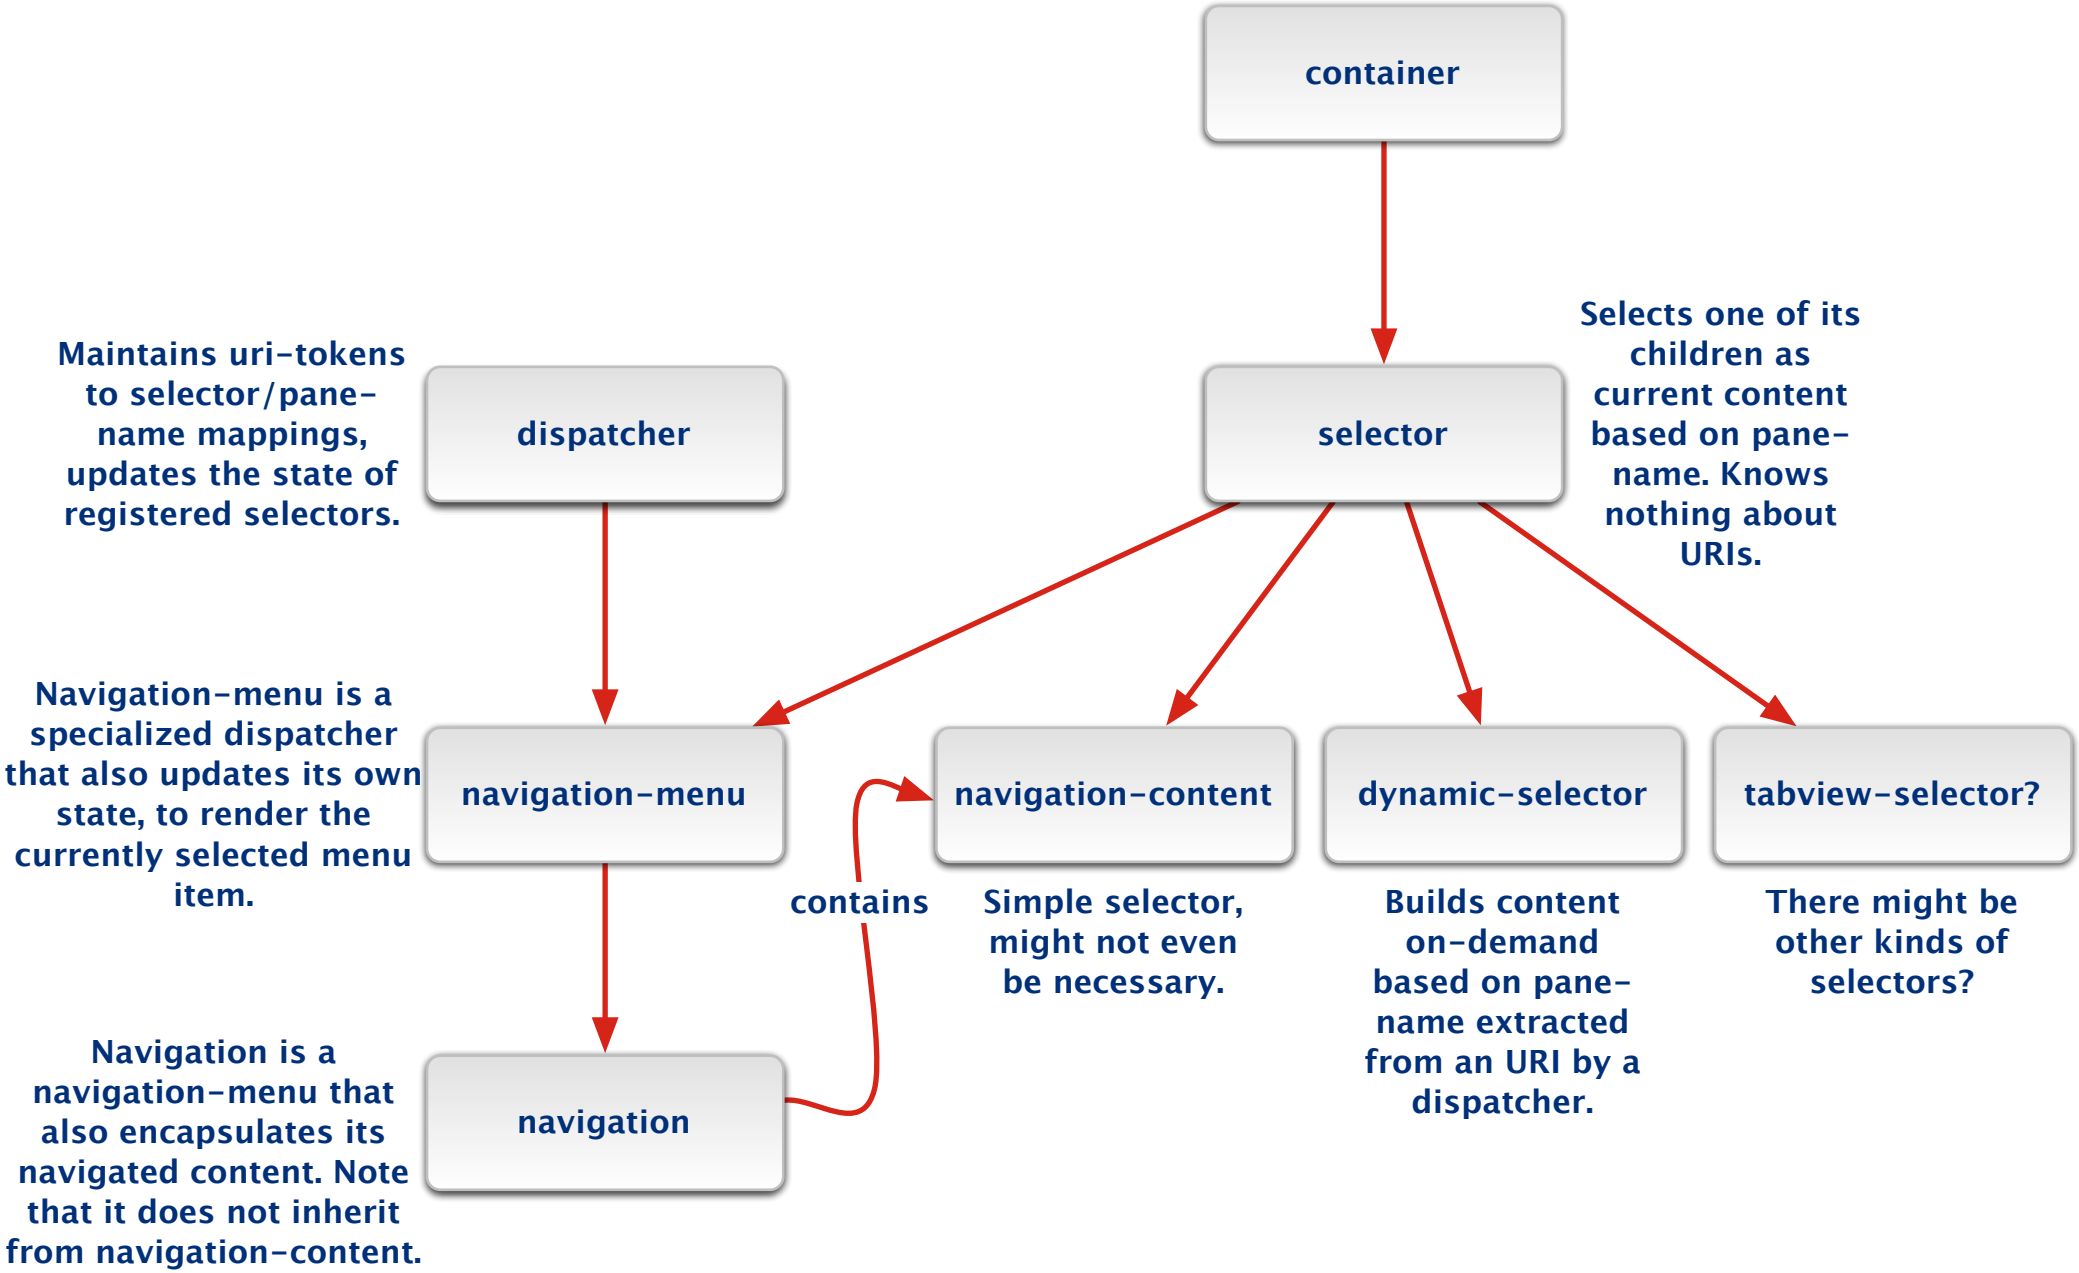
container
Selects one of its children as current content based on pane-name. Knows nothing about URIs.
Maintains uri-tokens to selector/pane-name mappings, updates the state of registered selectors.
dispatcher
selector
Navigation-menu is a specialized dispatcher that also updates its own state, to render the currently selected menu item.
navigation-menu
navigation-content
dynamic-selector
tabview-selector?
contains
Simple selector, might not even be necessary.
Builds content on-demand based on pane-name extracted from an URI by a dispatcher.
There might be other kinds of selectors?
Navigation is a navigation-menu that also encapsulates its navigated content. Note that it does not inherit from navigation-content.
navigation