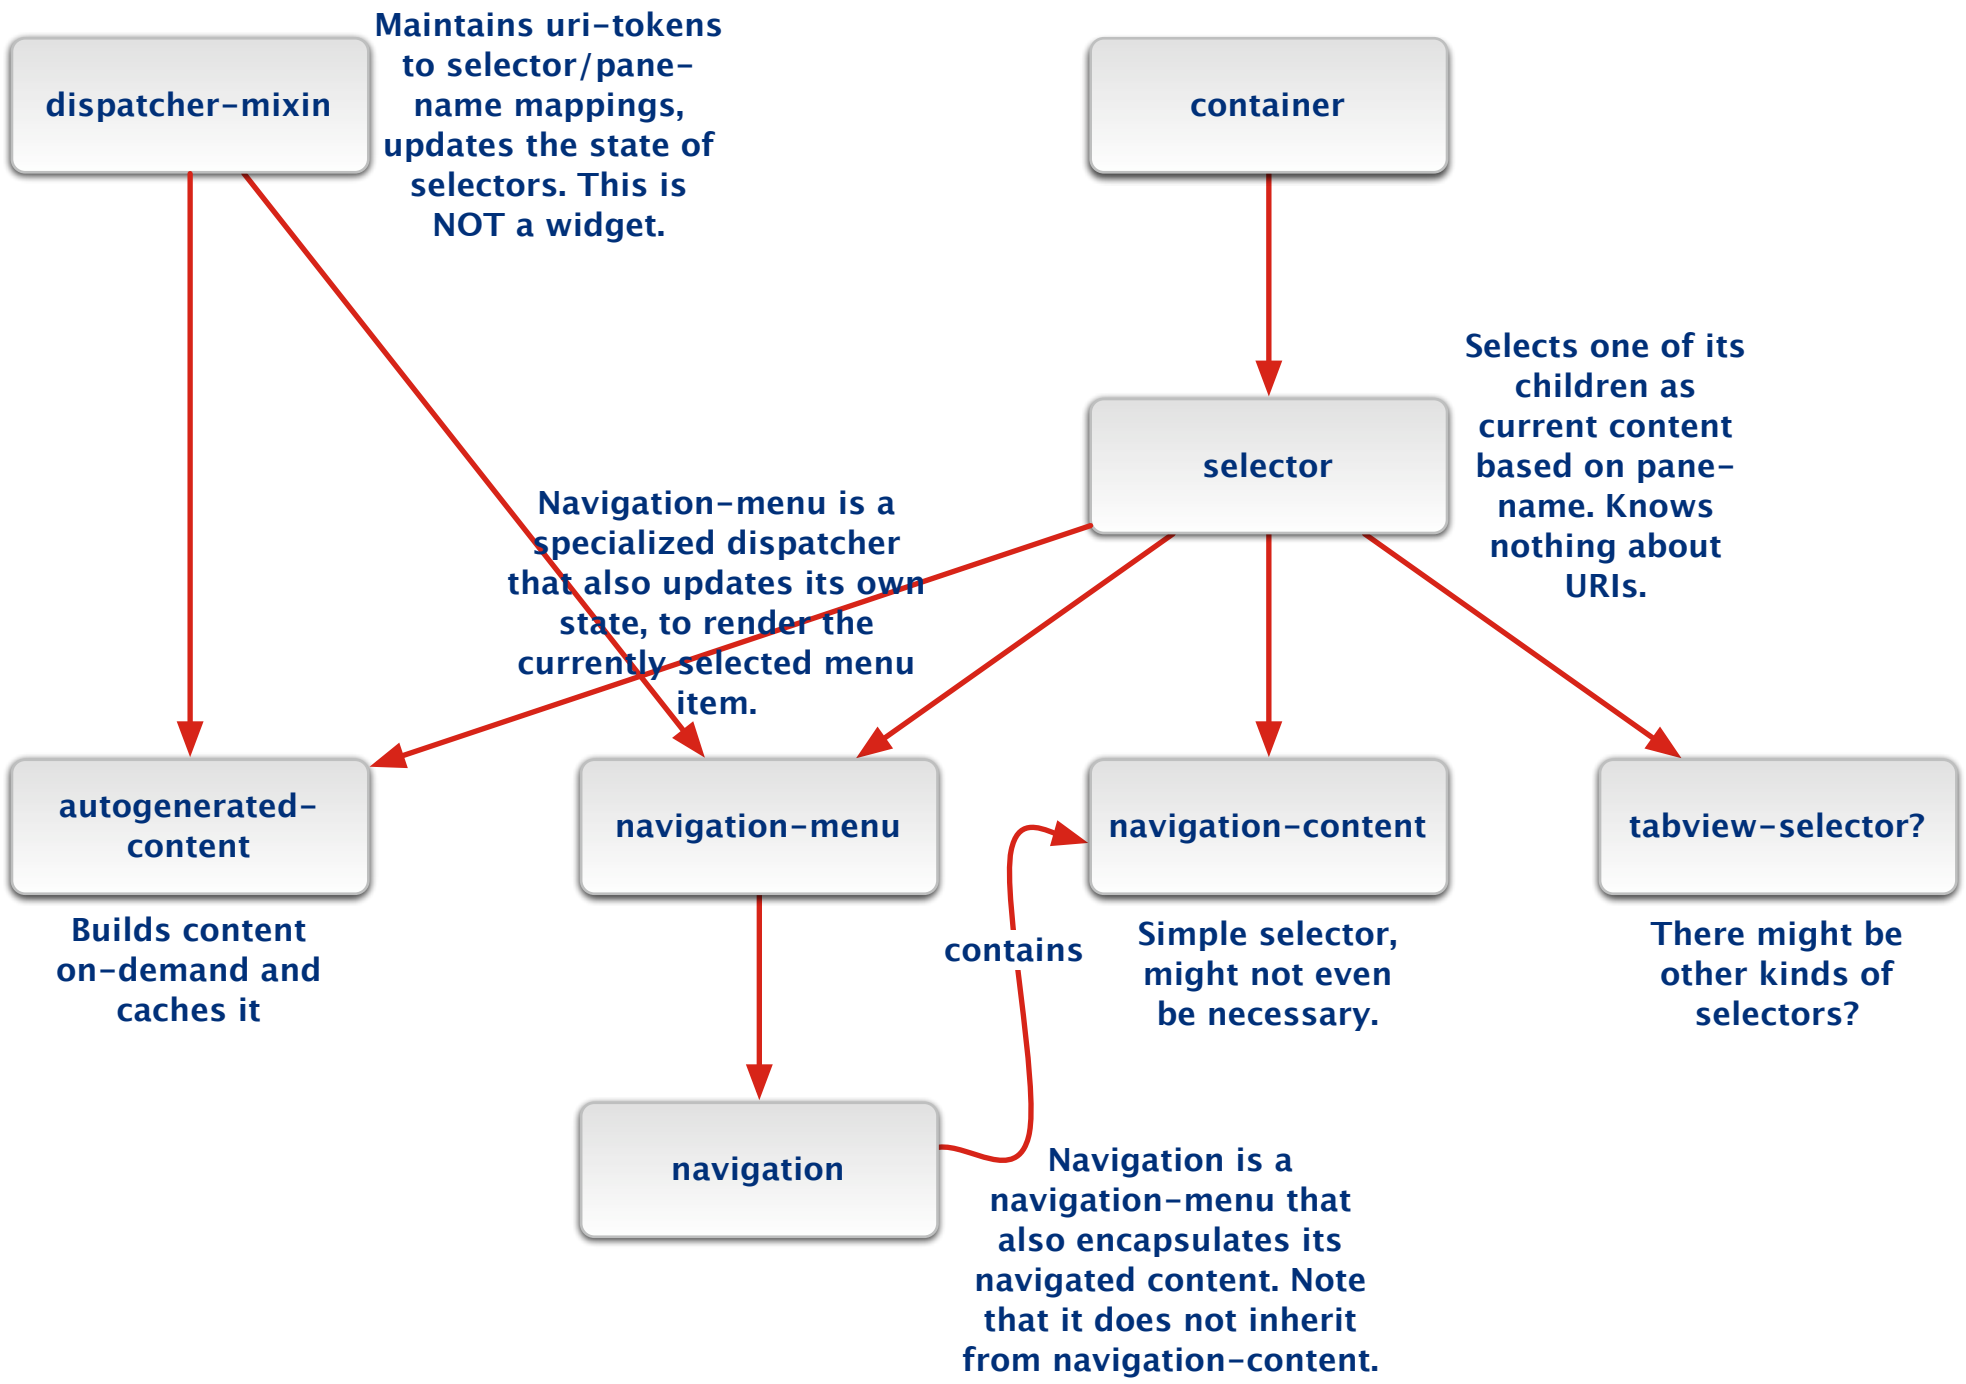
dispatcher-mixin
Maintains uri-tokens to selector/pane-name mappings, updates the state of selectors. This is NOT a widget.
container
selector
Selects one of its children as current content based on pane-name. Knows nothing about URIs.
Navigation-menu is a specialized dispatcher that also updates its own state, to render the currently selected menu item.
autogenerated-content
Builds content on-demand and caches it
navigation-menu
navigation-content
Simple selector, might not even be necessary.
tabview-selector?
There might be other kinds of selectors?
contains
navigation
Navigation is a navigation-menu that also encapsulates its navigated content. Note that it does not inherit from navigation-content.